



Petrochemical Drop hose




Special black NBR-PVC tank drop hose, reinforced with an anti-shock rigid PVC spiral and Polyester yarn; exposed spiral for easy handling and dragging. Its copper wire under the PVC spiral allows the dissipation of static electricity.

Lighter and more flexible than conventional rubber hoses. It's very resistant to oils and lubricants.

- Excellent solution for the transfer of petroleum and gasoline (with aromatic content up to 50%)

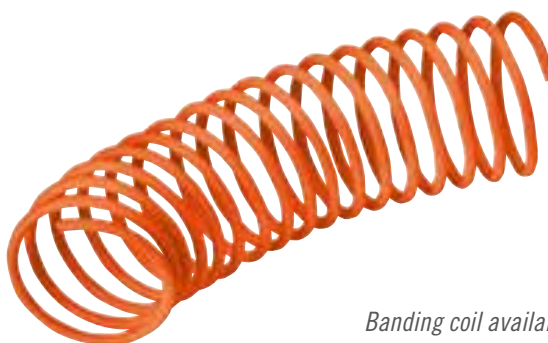

Banding coil available

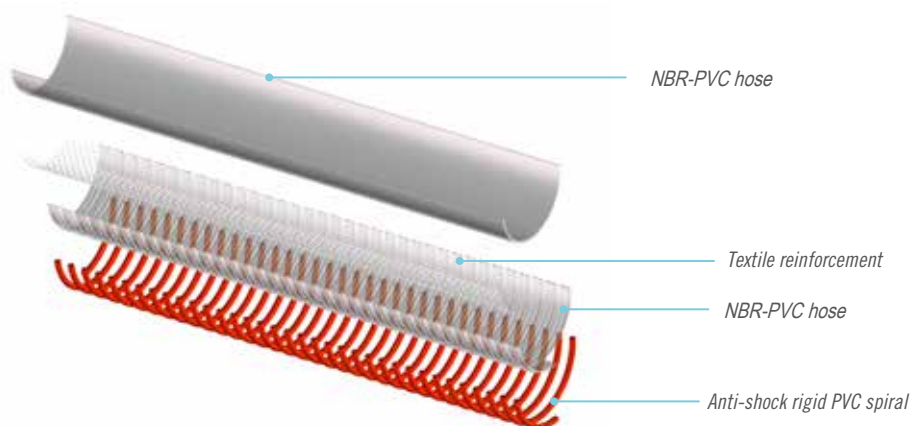

Technical data

Ins. Ø	Out Ø	Min wall th.	Max. wall th.	Weight	WP	BP	Vac.	Bending	Coil Lgth.	Vol.
[mm]	[mm]	[mm]	[mm]	[g/m]	bar	bar	[m H ₂ O]	[mm]	[m]	[m ³]
50,8	66,2	3,2	7,9	1130	7	21	9,5	200	30	0,288
76	95,8	3,7	10	1940	6	18	9	260	30	0,739
101,6	122,6	3,7	10,7	2705	6	18	9	360	30	0,945